


TEAM CONTROL SC UR

AWM Style 21179 (90°C / 1000V)

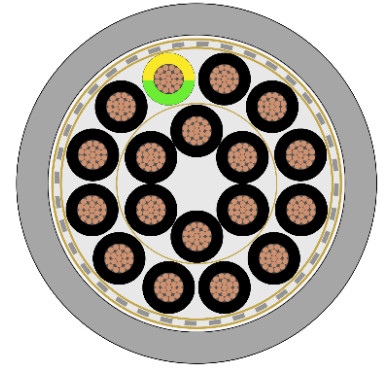

Conductor

Flexible red copper IEC 60228 Cl.5
Acc.to CEI 20-29, DIN VDE 0295

Color Conductor

Black cores with consecutive numbers + yellow green

Total Shield

Tinned copper braid coverage 85% +/- 5%

Nominal Voltage

UL 1000 V

Temperature

Fix -40° +90°
Mobile -5° +90°

Style

UL AWM Style 21179

Flame Test

Test method B according to DIN VDE 0472 part 804
Acc.to IEC 60332-3-24
UL VW1 and CSA FT1

Insulation

Special PVC Acc. To UL1581

Wrapping

PETP Foil

Jacket

Special PVC Acc. To UL1581
Color Grey RAL 7001

Test Voltage

4000 V

Bending Radius

Fix 6 x D
Mobile 20 x D

Oil Resistance

DIN EN 50290-2-22



Name	Cable Type	Ø mm	Weight Kg
FIXSC2X0,50UR	2 x 0,5	6,4	59,2
FIXSC3G0,50UR	3 x 0,5	6,8	67,6
FIXSC4G0,50UR	4 x 0,5	7,3	84,2
FIXSC5G0,50UR	5 x 0,5	7,9	98,1
FIXSC7G0,50UR	7 x 0,5	8,6	120,5
FIXSC12G0,50UR	12 x 0,5	11,1	188,7
FIXSC18G0,50UR	18 x 0,5	13,4	270,8
FIXSC2X0,75UR	2 x 0,75	6,8	66,9
FIXSC3G0,75UR	3 x 0,75	7,2	82,3
FIXSC4G0,75UR	4 x 0,75	7,8	97,9
FIXSC5G0,75UR	5 x 0,75	8,5	119,4
FIXSC7G0,75UR	7 x 0,75	9,2	142,2
FIXSC12G0,75UR	12 x 0,75	12,1	235,7
FIXSC18G0,75UR	18 x 0,75	14,5	337,7
FIXSC25G0,75UR	25 x 0,75	16,8	436,0
FIXSC2X1UR	2 x 1	7,1	73,7
FIXSC3G1UR	3 x 1	7,5	91,4
FIXSC4G1UR	4 x 1	8,1	110,0
FIXSC5G1UR	5 x 1	8,9	134,2
FIXSC7G1UR	7 x 1	9,8	171,3
FIXSC12G1UR	12 x 1	13,0	269,4
FIXSC18G1UR	18 x 1	15,3	388,8
FIXSC25G1UR	25 x 1	17,6	509,7
FIXSC2X1,5UR	2 x 1,5	7,7	97,2
FIXSC3G1,5UR	3 x 1,5	8,1	121,0
FIXSC4G1,5UR	4 x 1,5	8,8	151,4
FIXSC5G1,5UR	5 x 1,5	9,9	183,9
FIXSC7G1,5UR	7 x 1,5	10,7	229,1
FIXSC12G1,5UR	12 x 1,5	14,4	375,7
FIXSC18G1,5UR	18 x 1,5	16,9	546,8
FIXSC25G1,5UR	25 x 1,5	19,6	745,5



FIXSC2X2,5UR	2 x 2,5	8,7	123,3
FIXSC3G2,5UR	3 x 2,5	9,2	150,6
FIXSC4G2,5UR	4 x 2,5	10,2	199,2
FIXSC5G2,5UR	5 x 2,5	11,2	238,7
FIXSC7G2,5UR	7 x 2,5	12,4	306,9
FIXSC12G2,5UR	12 x 2,5	16,6	495,9
FIXSC18G2,5UR	18 x 2,5	19,6	735,2
FIXSC25G2,5UR	25 x 2,5	23,0	1.044,2
FIXSC2X4UR	2 x 4	10,1	171,2
FIXSC3G4UR	3 x 4	10,8	218,0
FIXSC4G4UR	4 x 4	11,8	280,8
FIXSC5G4UR	5 x 4	13,3	343,8
FIXSC7G4UR	7 x 4	14,7	443,4
FIXSC2X6UR	2 x 6	11,2	221,1
FIXSC3G6UR	3 x 6	12,1	291,0
FIXSC4G6UR	4 x 6	13,5	376,3
FIXSC5G6UR	5 x 6	15,0	461,0
FIXSC4G10UR	4 x 10	16,5	600,8
FIXSC5G10UR	5 x 10	18,2	734,3
FIXSC4G16UR	4 x 16	21,8	974,5
FIXSC5G16UR	5 x 16	24,0	1.239,6
FIXSC4G25UR	4 x 25	25,6	1.458,3
FIXSC5G25UR	5 x 25	28,5	1.779,9
FIXSC4G35UR	4 x 35	28,6	1.957,2
FIXSC5G35UR	5 x 35	32,5	2.385,7
FIXSC4G50UR	4 x 50	35,1	2.765,7

