


TEAM CONTROL SC

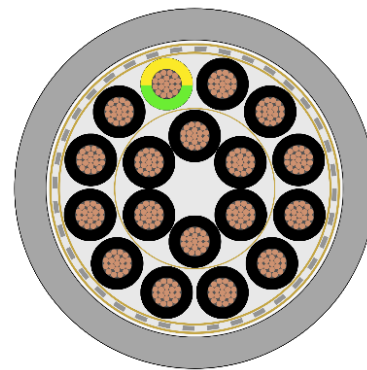

Conductor

Flexible red copper IEC 60228 Cl.5
Acc. to CEI 20-29, DIN VDE 0295

Color Conductor

Black cores with consecutive numbers + yellow green

Total Shield

Tinned copper braid coverage 85% +/-5%

Nominal Voltage

450/750 V

Temperature

Fix -40°C +80°C
Mobile -5°C +70°C

Normative

CEI 20-20/1 - CEI 20/2 IV° Ed. 1996

Flame Test

CEI 20-22/1 - CEI 20-22/2 equivalent to IEC 60332-3-22
CEI 20-22/4 IV° Ed. 1996

Insulation

PVC TI1 acc. to CEI 20-11 and VDE 0207 with special
mechanical resistance

Wrapping

PETP foil

Jacket

PVC TM2 acc. to CEI 20-11 and VDE 0207
Color Grey RAL 7001

Test Voltage

4000 V

Bending Radius

Fix 6 x D
Mobile 20 x D

Oil Resistance

Acc. to CEI 20-34/2-1 (CEI EN 60811-2-1)

Corrosive Gas Determination

CEI 20-37/2 II° Ed. 1997 equivalent to IEC 60754-1



Name	Cable Type	Ø mm	Weight Kg
FIXSC2X0,50	2 x 0,5	5,4	43,1
FIXSC3G0,50	3 x 0,5	5,7	51,2
FIXSC4G0,50	4 x 0,5	6,3	67,8
FIXSC5G0,50	5 x 0,5	6,9	78,6
FIXSC7G0,50	7 x 0,5	7,6	101,0
FIXSC12G0,50	12 x 0,5	9,7	157,9
FIXSC18G0,50	18 x 0,5	11,4	220,9
FIXSC25G0,50	25 x 0,5	13,5	292,6
FIXSC2X0,75	2 x 0,75	6,0	52,5
FIXSC3G0,75	3 x 0,75	6,3	67,9
FIXSC4G0,75	4 x 0,75	6,8	80,3
FIXSC5G0,75	5 x 0,75	7,6	102,0
FIXSC7G0,75	7 x 0,75	8,2	121,9
FIXSC12G0,75	12 x 0,75	10,7	198,0
FIXSC18G0,75	18 x 0,75	12,6	284,0
FIXSC25G0,75	25 x 0,75	14,9	394,8
FIXSC2X1	2 x 1	6,3	63,2
FIXSC3G1	3 x 1	6,7	76,9
FIXSC4G1	4 x 1	7,2	96,5
FIXSC5G1	5 x 1	8,0	116,6
FIXSC7G1	7 x 1	8,6	144,9
FIXSC12G1	12 x 1	11,3	234,7
FIXSC18G1	18 x 1	13,7	339,8
FIXSC25G1	25 x 1	15,7	461,2
FIXSC2X1,5	2 x 1,5	6,9	76,2
FIXSC3G1,5	3 x 1,5	7,5	103,1
FIXSC4G1,5	4 x 1,5	8,1	124,3
FIXSC5G1,5	5 x 1,5	9,0	155,4
FIXSC7G1,5	7 x 1,5	9,7	194,3
FIXSC12G1,5	12 x 1,5	12,7	314,2
FIXSC18G1,5	18 x 1,5	15,4	475,3



FIXSC25G1,5	25 x 1,5	17,8	627,4
FIXSC2X2,5	2 x 2,5	8,3	111,3
FIXSC3G2,5	3 x 2,5	9,0	150,1
FIXSC4G2,5	4 x 2,5	9,7	187,7
FIXSC5G2,5	5 x 2,5	10,8	228,8
FIXSC7G2,5	7 x 2,5	11,9	294,8
FIXSC12G2,5	12 x 2,5	15,8	497,9
FIXSC18G2,5	18 x 2,5	18,7	727,2
FIXSC25G2,5	25 x 2,5	21,7	969,5
FIXSC2X4	2 x 4	9,8	161,6
FIXSC3G4	3 x 4	10,5	212,3
FIXSC4G4	4 x 4	11,5	268,1
FIXSC5G4	5 x 4	12,7	332,6
FIXSC2X6	2 x 6	11,4	220,0
FIXSC3G6	3 x 6	12,3	298,7
FIXSC4G6	4 x 6	13,8	396,9
FIXSC5G6	5 x 6	15,3	491,9
FIXSC3G10	3 x 10	15,5	478,1
FIXSC4G10	4 x 10	17,1	616,5
FIXSC5G10	5 x 10	19,2	772,8
FIXSC3G16	3 x 16	18,0	695,5
FIXSC4G16	4 x 16	19,8	896,9
FIXSC5G16	5 x 16	22,2	1.121,6

